



# WIRELESS WHITE BULB

## Bulb - assembly and settings / how to do it?


### Assembly

Replace your existing bulb with the wireless-controlled bulb.




### Settings

Assigning to system units.




Each bulb has its own **address** (unique code). You insert this directly into the application **iHC-MAIRF / iHC-MIIRF** or into the touch control unit **RF Touch**.

Assigning to controllers.




Switch on the push-button three times at an interval of around 1 s (last position on) = programmable mode - the bulb flashes for 5 s while waiting for assignment of the controller.



Delete the assigned controller by switching on the existing 5 times (last position on - the bulb will flash 5x).

## Control



- FUNCTION OF BUTTONS**
- 1) < 0.5 s = ON/OFF
  - > 0.5 s = brightness settings
  - 2) > 0.5 s = temperature settings
  - 3), 4) open for adding further units

The last bulb settings are automatically stored after 15 seconds to be controlled by the existing push-button.

### iNELS Home Control

The application iNELS Home Control enables dimming of lighting, switching appliances, heating, control of blinds and all devices connected to the RF Control System, including IP video cameras via the Smart RF Box.




iHC-MAIRF




iHC-MIIRF

## WE CAN CONTROL YOUR HOME VIA SMARTPHONE!

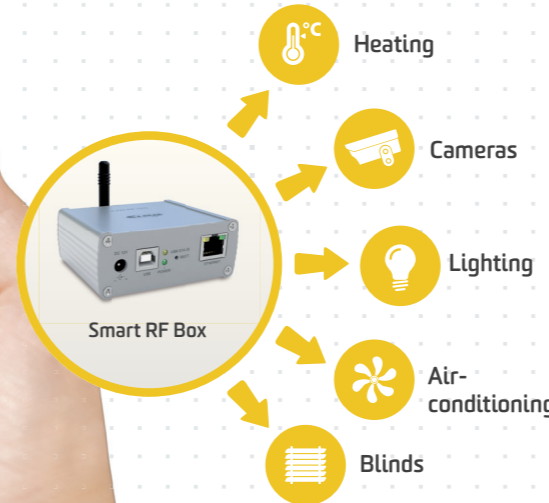

## Configuring the application / how to do it?

1. Click on "Configuration", then on "Settings" and go to the tab "Units".



2. To add further Units, click on "Add" and enter the required data (Name of unit: any, Select eLAN, Enter an address of actuator: see image 1, Type of actuator: type designation of unit - see image 2, Select of icon: according to function of given unit; see image 3, Please select a room). By pressing on "Save", insert the unit.

In this screen, you simply configure the device.

Back

Name of unit: \_\_\_\_\_ Any name for the device will suffice

Select eLAN: \_\_\_\_\_ Select eLAN

Enter an address of actuator: \_\_\_\_\_ Number of unit listed on the bulb see image 1

Type of actuator: \_\_\_\_\_ Name of given element see image 2

Select icon: \_\_\_\_\_ Select type of device see image 3

Please select a room: \_\_\_\_\_ Select a room

Save

Then confirm by pressing "Save"

## CONGRATULATIONS! The device is ready to use!

